




GTBZ-AE

Self-Propelled Articulating Boom Lifts (Battery Drive)



GTBZ18AE GTBZ16AE

| | | |
|---------------------------------|-------------------|-------------------|
| S.W.L | 230kg | 230kg |
| Max.Occupants | 2 | 2 |
| Max.Working Height | 18.00m | 16.30m |
| Max.Platform Height | 16.00m | 14.30m |
| Max.Horizontal Reach | 8.30m | 7.15m |
| Turntable Tailswing | 0 | 0 |
| Up And Over Clearance | 8.90m | 7.89m |
| A Overall Length | 7.21m | 6.77m |
| B Overall Width | 1.73m | 1.73m |
| C Overall Height | 2.00m | 2.00m |
| Platform Size (Length/Width) | 1.45m×0.76m | 1.45m×0.76m |
| Ground Clearance | 0.20m | 0.20m |
| B Wheelbase | 2.00m | 2.00m |
| Turning Radius (Inside/Outside) | 2.08m/3.30m | 2.08m/3.30m |
| Turret Rotation | 360° Uncontinuous | 360° Uncontinuous |
| Platform Rotation | ±90° | ±90° |
| Jib Movement | +70°/-60° | +70°/-60° |
| Batteries | 8×6V/420Ah | 8×6V/420Ah |
| Integrated Charger | 48V/25A | 48V/25A |
| Drive Motors | AC 48V/3.3kW | AC 48V/3.3kW |
| Lifting Motor | 48V/4.5kW | 48V/4.5kW |
| Travel Speed (Stowed) | 6.1km/h | 6.1km/h |
| Travel Speed (Raised) | 1.1km/h | 1.1km/h |
| Gradeability | 25% | 30% |
| Max.Working Slope | 3° | 3° |
| Hydraulic Tank | 30L | 30L |
| Tyres | 17.5×6.75 | 17.5×6.75 |
| Weight | 7420kg | 6700kg |

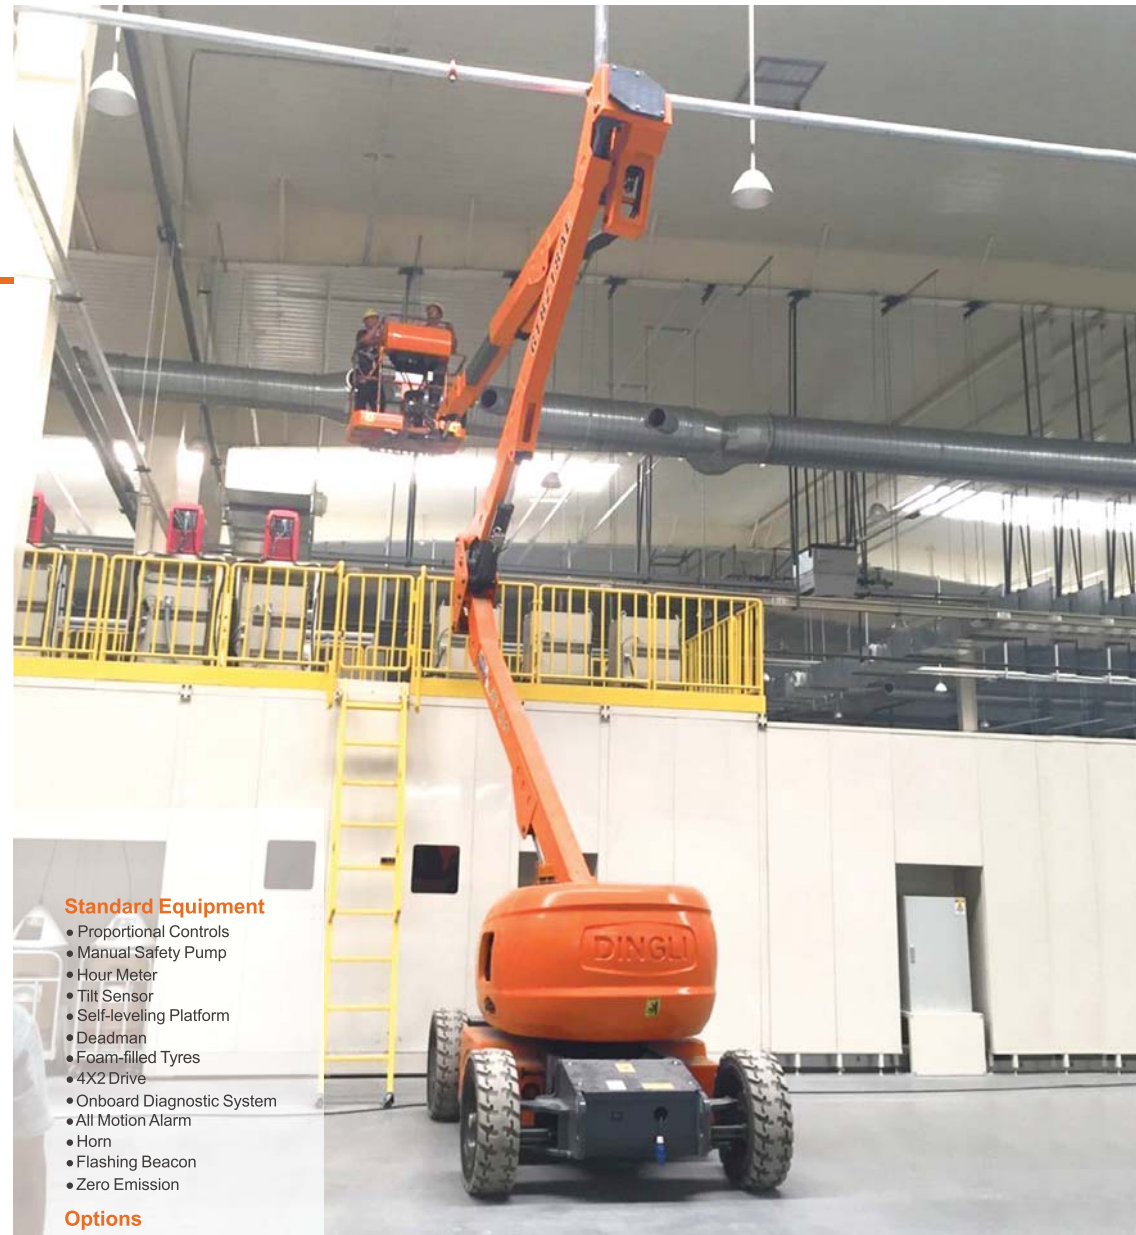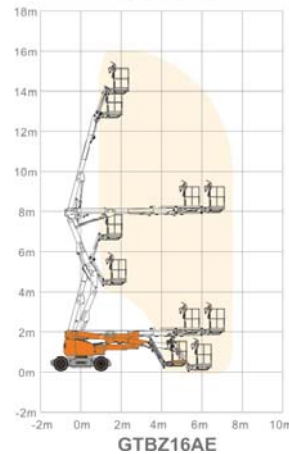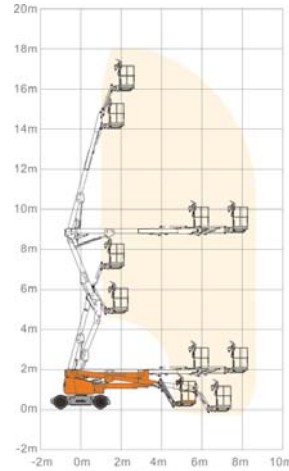


Standard Equipment

- Proportional Controls
- Manual Safety Pump
- Hour Meter
- Tilt Sensor
- Self-leveling Platform
- Deadman
- Foam-filled Tyres
- 4X2 Drive
- Onboard Diagnostic System
- All Motion Alarm
- Horn
- Flashing Beacon
- Zero Emission

Options

- Non-marking Tyres
- AC Power To Platform
- Platform Work Lights
- Overload Sensor With Alarm

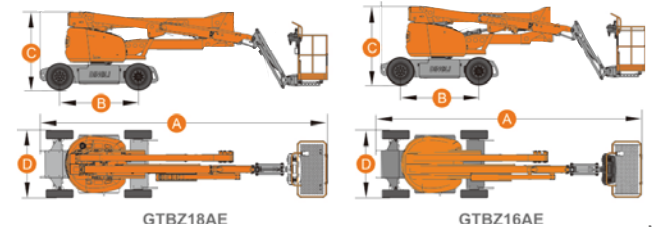

Gradeability



Manual Safety Pump



Waterproof Platform Control



Batteries